



MITEL
Technical Data

MD4311B/4511B

CMOS/MSI 7-SEGMENT DECODER/DRIVER/LATCH

FEB. 79

DESCRIPTION


The 4311B/4511B are CMOS/MSI 7-Segment Decoder Driver incorporating input latches and bipolar NPN output circuits, where each segment is capable of sourcing over 25 mAdc of current to drive LED, incandescent, fluorescent, gas discharge or LCD displays. See back page for part numbers.

CMOS POWER CONSUMPTION (25 nW typ.)
EITHER BCD OR HEXADECIMAL CODES
HIGH SPEED INPUT LATCHES FOR DATA
STORAGE JEDEC-B SPEC. 3 VOLT TO 18
VOLT CMOS OPERATION TIME SHARE
CAPABILITY.

4511B SAME AS 14511 OR 4511 TYPES.


PIN NAMES

A₁, B₁, C₁, D Address (Data) Inputs
LE Latch Enable (Active HIGH) Input
BI Blanking (Active LOW) Input
LT Lamp Test (Active LOW) Input
a, b, c, d, e, f, g (Active HIGH) Outputs



V_{DD} = PIN 16
V_{SS} = Pin 8


CONNECTION DIAGRAM
DIP (TOP VIEW)

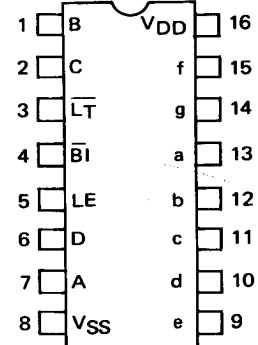

NUMERICAL DESIGNATIONS

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
4311B	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
4511B	0	1	2	3	4	5	6	7	8	9	BLANKED					

BLOCK DIAGRAM 4311B/4511B

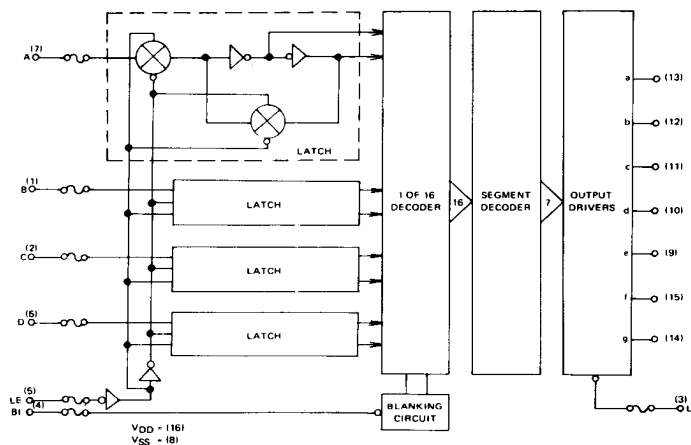

53
279
002980
2/79
ORIG
MIT

FUNCTIONAL DESCRIPTION

The 4311B and 4511B are CMOS/MSI 7-Segment Decoder Drivers which provide the function of a 4-bit storage latch with either an 8421 BCD-to-seven segment decoder (4511B) or an 8421 Hexadecimal-to-seven segment decoder (4311B), and an output source current capability of greater than 50mA in pulsed mode.

Lamp test ($\overline{LT}$), blanking ($\overline{BI}$) and latch enable (LE) inputs are used to test the display, to turn-off or pulse modulate the brightness of the display, and to store a 8421 code, respectively.

The latches on the four data inputs (A, B, C, D) are controlled by an active HIGH latch enable LE. When LE is LOW, the state of the outputs is determined by the input data. When LE goes HIGH, the last data present at the inputs is stored in the latches and the outputs remain stable. (Latch enabled).

TRUTH TABLE

DISPLAY	INPUTS							OUTPUTS													
	LE	$\overline{BI}$	$\overline{LT}$	D	C	B	A	4311B							4511B						
								a	b	c	d	e	f	g	a	b	c	d	e	f	g
—	H	H	H	X	X	X	X	STABLE							STABLE						
BLANK	X	L	H	X	X	X	X	L	L	L	L	L	L	L	L	L	L	L	L	L	L
8	X	X	L	X	X	X	X	H	H	H	H	H	H	H	H	H	H	H	H	H	H
0	L	H	H	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H
1	L	H	H	L	L	L	H	L	H	H	L	L	L	L	L	H	H	L	L	L	L
2	L	H	H	L	L	H	L	H	H	L	H	H	L	H	H	H	L	H	H	L	H
3	L	H	H	L	L	H	H	H	H	H	H	L	L	H	H	H	H	H	L	L	H
4	L	H	H	L	H	L	L	L	H	H	L	L	H	H	L	H	H	L	L	H	H
5	L	H	H	L	H	L	H	H	L	H	H	L	H	H	H	L	H	H	L	H	H
6	L	H	H	L	H	H	L	H	L	H	H	H	H	H	L	L	H	H	H	H	H
7	L	H	H	L	H	H	H	H	H	H	L	L	L	L	H	H	H	L	L	L	L
8	L	H	H	H	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H
9	L	H	H	H	L	L	H	H	H	H	L	H	H	H	H	H	H	L	L	H	H
A*	L	H	H	H	L	H	L	H	H	H	L	H	H	H	L	L	L	L	L	L	L
B*	L	H	H	H	L	H	H	L	L	H	H	H	H	H	L	L	L	L	L	L	L
C*	L	H	H	H	H	L	L	H	L	L	H	H	H	L	L	L	L	L	L	L	L
D*	L	H	H	H	H	L	H	L	H	H	H	H	L	H	L	L	L	L	L	L	L
E*	L	H	H	H	H	H	L	H	L	L	H	H	H	H	L	L	L	L	L	L	L
F*	L	H	H	H	H	H	H	H	L	L	L	L	H	H	L	L	L	L	L	L	L

* Blanked for 4511B

** Don't care
For 4511B

DEFINITION	INPUTS	OUTPUTS
H	HIGH Voltage Level	Sourcing Current
L	LOW Voltage Level	Output is "off"
X	Don't Care	

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 18V dc.

Storage Temperature -65°C. to 150°C.

Operation temperature -40°C. to 85°C. or -55°C. to 125°C.



Characteristic	Symbol	VDD Vdc	MILITARY								COMMERCIAL								Unit
			-55°C		+25°C		+125°C		-40°C		+25°C		-85°C						
			Min.	Max.	Min.	Typ.	Max.	Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.			
Output Voltage "O" Level	Vout	5.0	--	0.01	--	0	0.01	--	0.05	--	0.01	--	0	0.01	--	0.05	Vdc		
		10	--	0.01	--	0	0.01	--	0.05	--	0.01	--	0	0.01	--	0.05			
		15	--	--	--	0	--	--	--	--	--	--	0	--	--	--			
		5.0	4.1	--	4.1	4.57	--	4.1	--	4.1	--	4.1	4.57	--	4.1	--			
		10	9.1	--	9.1	9.58	--	9.1	--	9.1	--	9.1	9.58	--	9.1	--			
15	--	--	--	14.59	--	--	--	--	--	--	14.59	--	--	--	--				
Noise Immunity* (Vout ≥ 3.5Vdc) (Vout ≥ 7.0Vdc) (Vout ≥ 10.5Vdc)	VNL	5.0	1.5	--	1.5	2.25	--	1.4	--	1.5	--	1.5	2.25	--	1.4	--	Vdc		
		10	3.0	--	3.0	4.50	--	2.9	--	3.0	--	3.0	4.50	--	2.9	--			
		15	--	--	--	6.75	--	--	--	--	--	--	6.75	--	--	--			
	VNH	5.0	1.4	--	1.5	2.25	--	1.5	--	1.4	--	1.5	2.25	--	1.5	--	Vdc		
		10	2.9	--	3.0	4.50	--	3.0	--	2.9	--	3.0	4.50	--	3.0	--			
15	--	--	--	--	6.75	--	--	--	--	--	--	--	--	--	--	--			
Output Drive Voltage (IOH = 0 mAdc) Source (IOH = 5.0 mAdc) (IOH = 10 mAdc) (IOH = 15 mAdc) (IOH = 20 mAdc) (IOH = 25 mAdc) (IOH = 0 mAdc) (IOH = 5.0 mAdc) (IOH = 10 mAdc) (IOH = 15 mAdc) (IOH = 20 mAdc) (IOH = 25 mAdc) (IOH = 0 mAdc) (IOH = 5.0 mAdc) (IOH = 10 mAdc) (IOH = 15 mAdc) (IOH = 20 mAdc) (IOH = 25 mAdc) (VOL = 0.4 Vdc) Sink (VOL = 0.5 Vdc) (VOL = 1.5 Vdc)	VOH	5.0	--	--	4.10	4.57	--	--	--	--	4.10	4.57	--	--	--	Vdc			
		--	--	--	--	4.24	--	--	--	--	--	4.24	--	--	--				
		--	--	--	3.90	4.12	--	--	--	--	--	3.60	4.12	--	--		--		
		--	--	--	--	3.94	--	--	--	--	--	--	3.94	--	--		--		
		--	--	--	3.40	3.75	--	--	--	--	--	2.80	3.75	--	--		--		
		--	--	--	--	3.54	--	--	--	--	--	--	3.54	--	--		--		
	10	--	--	--	9.10	9.58	--	--	--	--	--	9.10	9.58	--	--	--	Vdc		
		--	--	--	--	9.26	--	--	--	--	--	--	9.26	--	--	--			
		--	--	--	9.0	9.17	--	--	--	--	--	8.75	9.17	--	--	--			
		--	--	--	--	9.04	--	--	--	--	--	--	9.04	--	--	--			
		--	--	--	8.60	8.90	--	--	--	--	--	8.10	8.90	--	--	--			
		--	--	--	--	8.75	--	--	--	--	--	--	8.75	--	--	--			
	15	--	--	--	14.59	--	--	--	--	--	--	14.59	--	--	--	--	Vdc		
		--	--	--	--	14.27	--	--	--	--	--	--	14.27	--	--	--			
		--	--	--	--	14.18	--	--	--	--	--	--	14.18	--	--	--			
		--	--	--	--	14.07	--	--	--	--	--	--	14.07	--	--	--			
		--	--	--	--	13.95	--	--	--	--	--	--	13.95	--	--	--			
		--	--	--	--	13.80	--	--	--	--	--	--	13.80	--	--	--			
	IOL	5.0	0.5	--	0.40	0.78	--	0.28	--	0.23	--	0.20	0.78	--	0.16	--	mAdc		
		10	1.1	--	0.90	2.0	--	0.65	--	0.60	--	0.50	2.0	--	0.40	--			
		15	--	--	--	7.8	--	--	--	--	--	--	7.8	--	--	--			
Input Current	Iin	--	--	--	--	10	--	--	--	--	--	10	--	--	--	pAdc			
Input Capacitance (Vin = 0)	Cin	--	--	--	--	5.0	--	--	--	--	--	5.0	--	--	--	pF			
Quiescent Dissipation	PD	5.0	--	25	--	0.025	25	--	1500	--	250	--	0.025	250	--	3500	uW		
		10	--	100	--	0.1	100	--	6000	--	1000	--	0.1	1000	--	14000			
		15	--	--	--	0.23	--	--	--	--	--	--	0.23	--	--	--			
Output Rise Time (CL = 50pF)	tr	5.0	--	--	--	40	200	--	--	--	--	40	250	--	--	ns			
		10	--	--	--	30	100	--	--	--	--	30	160	--	--				
		15	--	--	--	18	--	--	--	--	--	18	--	--	--				
Output Fall Time (CL = 50pF)	tf	5.0	--	--	--	200	--	--	--	--	--	200	--	--	--	ns			
		10	--	--	--	160	--	--	--	--	--	160	--	--	--				
		15	--	--	--	100	--	--	--	--	--	100	--	--	--				
Propagation Delay Time (Data) (CL = 50pF)	tPLH	5.0	--	--	--	660	1500	--	--	--	--	640	2250	--	--	ns			
		10	--	--	--	260	600	--	--	--	--	250	900	--	--				
		15	--	--	--	190	--	--	--	--	--	175	--	--	--				
	tPHL	5.0	--	--	--	720	1500	--	--	--	--	720	2250	--	--	ns			
		10	--	--	--	290	600	--	--	--	--	290	900	--	--				
		15	--	--	--	195	--	--	--	--	--	195	--	--	--				
Propagation Delay Time (Blank) (CL = 50pF)	tPLH	5.0	--	--	--	340	1000	--	--	--	--	320	1500	--	--	ns			
		10	--	--	--	145	400	--	--	--	--	130	600	--	--				
		15	--	--	--	115	--	--	--	--	--	100	--	--	--				
	tPHL	5.0	--	--	--	485	1000	--	--	--	--	485	1500	--	--	ns			
		10	--	--	--	200	400	--	--	--	--	200	600	--	--				
		15	--	--	--	160	--	--	--	--	--	160	--	--	--				
Propagation Delay Time (Lamp Test) (CL = 50pF)	tPLH	5.0	--	--	--	290	625	--	--	--	--	290	940	--	--	ns			
		10	--	--	--	125	250	--	--	--	--	125	375	--	--				
		15	--	--	--	85	--	--	--	--	--	85	--	--	--				
	tPHL	5.0	--	--	--	290	625	--	--	--	--	290	940	--	--	ns			
		10	--	--	--	120	250	--	--	--	--	120	375	--	--				
		15	--	--	--	90	--	--	--	--	--	90	--	--	--				
Set-Up Time	tsetup	5.0	--	--	180	90	--	--	--	--	270	90	--	--	--	ns			
		10	--	--	76	38	--	--	--	--	114	38	--	--	--				
		15	--	--	--	20	--	--	--	--	--	20	--	--	--				
Hold Time	thold	5.0	--	--	0	-90	--	--	--	--	0	-90	--	--	--	ns			
		10	--	--	0	-38	--	--	--	--	0	-38	--	--	--				
		15	--	--	--	-20	--	--	--	--	--	-20	--	--	--				
Minimum Latch Enable Pulse Width	PWLE	5.0	--	--	520	260	--	--	--	--	780	260	--	--	--	ns			
		10	--	--	220	110	--	--	--	--	330	110	--	--	--				
		15	--	--	--	65	--	--	--	--	--	65	--	--	--				

*DC Noise Margin (VNH - VNL) is defined as the maximum voltage change from an ideal "1" or "0" input level before producing an output state change.


GUARANTEED OPERATING RANGES

PART NUMBER	VDD			TEMPERATURE	PACKAGE
	MIN.	TYP.	MAX.		
MD4311BE	3V	5V	18V	-40°C to 85°C	Expoxy Dual-in-Line
SIL4511BE	3V	5V	18V	-40°C to 85°C	Expoxy Dual-in-Line
MD4311BC	3V	5V	18V	-40°C to 85°C	Ceramic Dual-in-Line
SIL4511BC	3V	5V	18V	-40°C to 85°C	Ceramic Dual-in-Line
MD4311BF	3V	5V	18V	-55°C to 125°C	Ceramic Dual-in-Line
SIL4511BF	3V	5V	18V	-55°C to 125°C	Ceramic Dual-in-Line
MD4311BI	3V	5V	18V	-55°C to 125°C	Tested Chips-883, 2010B
SIL4511BI	3V	5V	18V	-55°C to 125°C	Tested Chips-883, 2010B
MD4311BH	3V	5V	18V	-40°C to 85°C	Tested Chips-883, 2010B
SIL4511BH	3V	5V	18V	-40°C to 85°C	Tested Chips-883, 2010B

FIGURE 1 — DERATING AND OUTPUT DRIVE CURVES PER OUTPUT

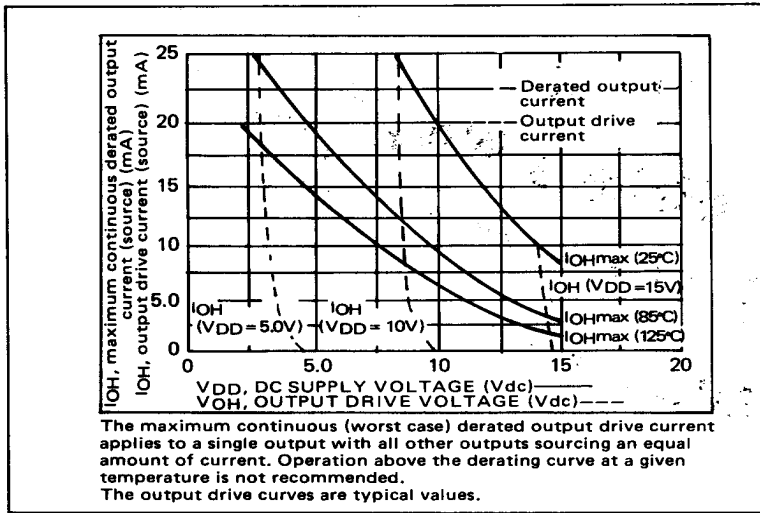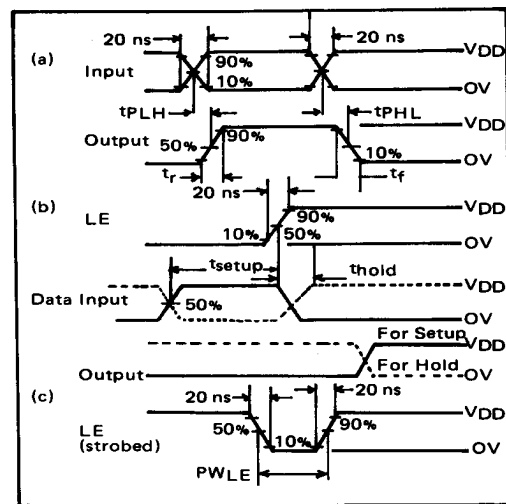FIGURE 2
DYNAMIC SIGNAL WAVEFORMS

CONNECTIONS TO VARIOUS DISPLAY READOUTS

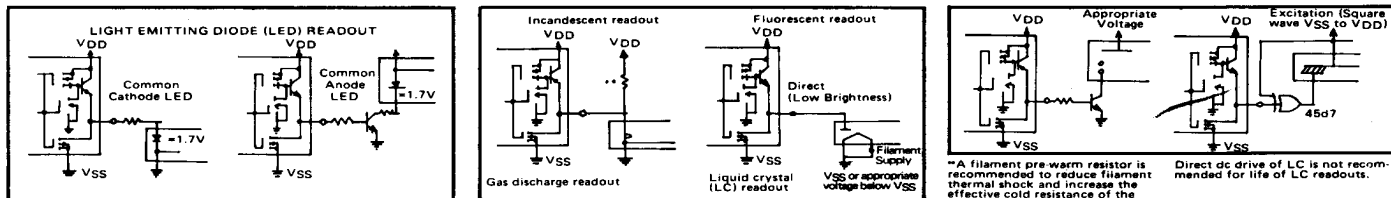

Information furnished by MITEL Semiconductor is believed to be accurate and reliable. However, no responsibility is assumed by MITEL Semiconductor for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MITEL Semiconductor. Specifications are subject to change without notice.

For more information write or phone the leaders in CMOS technology, MITEL Semiconductor:

UNITED STATES: 1745 Jefferson Davis Hwy., Suite 603, Arlington, Va. 22202 (703) 243-1600 TWX; 710-955-0026
1 So. Main St., Janesville, Wis. 53545 (608) 752-3537
2321 Morena Blvd., Suite M, San Diego, Calif. 92110 (714) 276-3421
6236 Tulip Lane, Dallas, Texas 75230 (214) 692-1554
3100 Lorna Road, Suite 317, Birmingham, Alabama 35216 (205) 822-7723
5600 South Syracuse Circle, Suite 201A, Englewood, Colorado 80110; (303) 779-3027
CANADA: P.O. Box 13089, Kanata, Ottawa K2K 1X3 (613) 592-2122 TLX: 053-4596
18 Airport Blvd., Bromont, Quebec, JOE 1L0 (514) 534-2321 TLX: 05-267474
1124 Lonsdale Ave., Suite 304A, North Vancouver, British Columbia V7M 2H1 (604) 988-2510
EUROPE: 1A Albert Street, Slough, England, SL1 2BL (0753) 28154 TLX: 847730
Fredericiagade 16, Suite 309, 1310 Copenhagen K., Denmark, Telephone (01) 119302
FAR EAST: Park-In Commercial Centre, Suite 1423, 56 Dundas Street, Mong Kok, Kowloon, Hong Kong, TLX: 64235

